



PLECS

*DEMO MODEL*

## Plant Code Generation: Three-Phase 6-Pulse Thyristor Converter

Last updated in PLECS 4.5.1

[www.plexim.com](http://www.plexim.com)

- ▶ Request a PLECS and PLECS Coder trial license
- ▶ Get the latest RT Box Target Support Package
- ▶ Check the PLECS and RT Box documentation

# 1 Overview

This example demonstrates PLECS Standalone code generation capabilities for physical systems including electrical circuits. In this model ANSI-C code is generated to represent a three-phase thyristor (SCR) rectifier circuit. The model performance using generated C code is benchmarked against the base-line system using native PLECS components. Code generation for physical systems is essential to model physical plants in a real-time simulation environment, such as with the RT Box family of simulators.

Please note that in order to follow the steps as described below and run the simulation, you will need a PLECS Coder license to enable code generation. To request a trial license for the PLECS Coder, please email Plexim at [info@plexim.com](mailto:info@plexim.com).

## Note

It is important to first create a working copy of this model (**File + Save as...**) before making changes or attempting to generate code.

# 2 Model

This schematic shows a 6-pulse, 3-phase thyristor based converter. In this model, the electrical circuit shown below will be discretized and simulated using generated C code. A detailed explanation of the 6-pulse, 3-phase thyristor converter and the control scheme is given in the demo model "Three-Phase 6-Pulse Thyristor Converter".

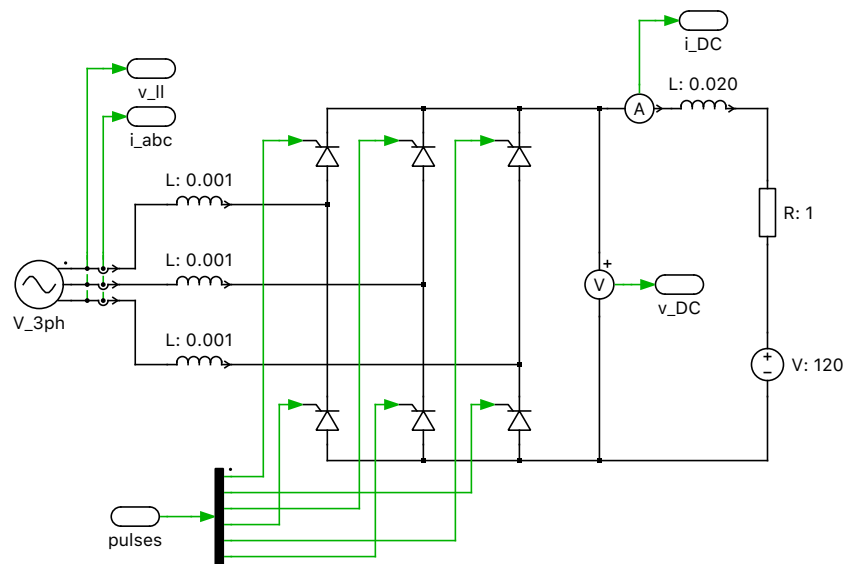


Fig. 1: Electrical schematic of a 6-pulse, 3-phase thyristor converter

# 3 Simulation


## 3.1 Baseline simulation results

An initial simulation is run using native PLECS components without code generation to record a set of baseline results. The baseline results will be compared with the results using generated code. In the simulation the DC-side reference current is initially set to zero amps. At 10 ms the reference current is ramped up to 10 A over a duration of 20 ms. At 60 ms the current reference is increased to 25 A. Run the simulation and observe the DC current waveform in the Scope. Notice that the current contains a low-frequency AC-component. Hold the completed simulation trace and label it as "Normal Mode".

### 3.2 Discretization and code generation

The next step is to generate ANSI-C code for the plant using the code generation capabilities of PLECS. This requires enabling code generation and specifying the discretization time for the physical system.

To enable code generation, first navigate to the subsystem settings of the electrical circuit contained in the subsystem labeled “Circuit”. This menu is accessed by right-clicking the block labeled “Circuit” and selecting **Subsystem + Execution settings...** The **Execution settings...** menu can also be accessed by selecting the “Circuit” subsystem, and then selecting **Subsystem + Execution settings...** from the **Edit** drop-down menu. Check the option **Enable code generation**. Note that this option is only shown if you have a license for the PLECS Coder. This will automatically enable the **Treat as atomic unit** option. To allow code generation, the electrical circuit must be treated as an atomic unit. Click on **Apply** and notice how the border of the subsystem is drawn with a thicker line to indicate the “atomic” configuration, as shown in the figure below.

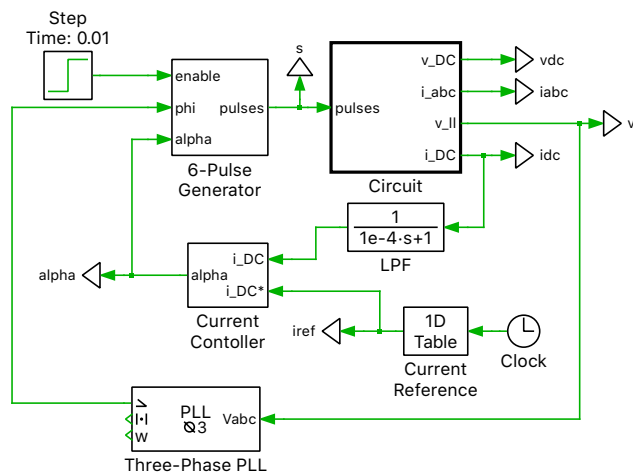

**Fig. 2: Control schematic with the “Circuit” subsystem modeled as an atomic subsystem**


Checking the option **Enable code generation** also causes the subsystem to be added to the list of systems in the **Coder Options** dialog. Open this dialog by choosing **Coder options...** from the **Coder** drop-down menu. In the list on the left hand side of the dialog choose the entry **Circuit**. The right hand side shows various configuration settings for the code generation. Please refer to the PLECS Coder documentation for detailed information about these settings.

The parameter **Discretization step size** specifies the sample time used for the discretization of the electrical model in the “Circuit” subsystem. Begin by discretizing the model with a step size of  $1e-3$  s. Then, generate code by clicking the **Build** button. Notice the C files that appear in the specified output directory. The output folder contains one header file and one implementation file. Inspect both files with a text editor. The files are named after the subsystem for which the code was generated (“Circuit”) and have extensions .h and .c file, respectively. The PLECS Coder produces C code according to an API that also permits easy integration with the real-time simulation framework

Checking the option **Enable code generation** in the **Execution Settings** dialog also enables the **Simulation mode** option. This setting is accessed by right-clicking the “Circuit” subsystem and then selecting **Subsystem + Simulation mode**. The **Simulation mode** selection is also conveniently available from the **Edit** drop-down menu. When this option is set to **Normal**, which is the default, the subsystem is simulated using the contained native PLECS blocks. When the option is set to **CodeGen**, the generated code is automatically compiled by PLECS and executed in place of the subsystem during a simulation. This functionality, combined with the **Hold current trace** feature of the Scope, allows for an effective verification of the behavior of the generated code, by comparing the results against those obtained from a normal simulation.

Select **CodeGen** as the simulation mode from the drop-down menu and apply the changes. The border of the subsystem is now highlighted with dashed lines to indicate that this portion of the model will ex-



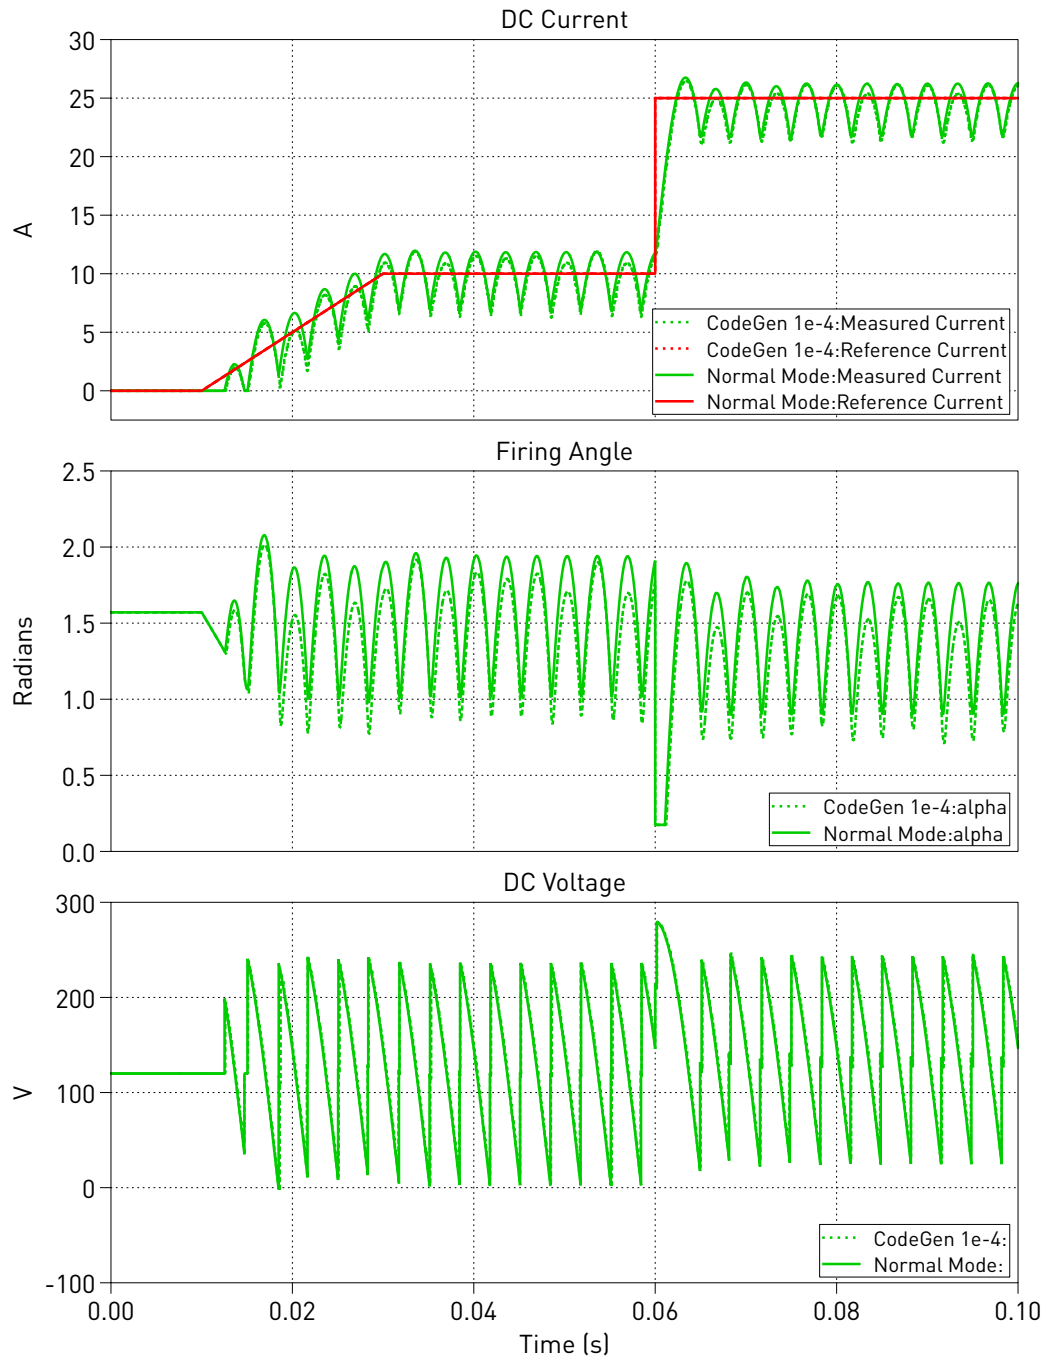

**Fig. 4: Comparison of "Normal Mode" and "CodeGen 1e-4" Results**

## Revision History:

PLECS 4.3.1	First release
PLECS 4.5.1	Updating PLL component with new library block

## How to Contact Plexim:

+41 44 533 51 00	Phone
+41 44 533 51 01	Fax
Plexim GmbH Technoparkstrasse 1 8005 Zurich Switzerland	Mail
info@plexim.com	Email
<a href="https://www.plexim.com">https://www.plexim.com</a>	Web

## *PLECS Demo Model*

© 2002–2026 by Plexim GmbH

The software PLECS described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from Plexim GmbH.

PLECS is a registered trademark of Plexim GmbH. MATLAB, Simulink and Simulink Coder are registered trademarks of The MathWorks, Inc. Other product or brand names are trademarks or registered trademarks of their respective holders.